



A Method for Correcting for Telescope Spectral Transmission in the Geosynchronous Imaging Fourier Transform Spectrometer (GIFTS)

John D. Elwell, Deron K. Scott

Space Dynamics Laboratory / Utah State University

GIFTS

- GIFTS mission is to provide water vapor, wind, temperature, and trace gas profiles from geosynchronous orbit
 - Requires highly accurate radiometric and spectral calibration
- Radiometric calibration will be performed during ground calibration and updated in-flight using two on-board cavity blackbody in-flight calibrators (IFCs) and cold space
- Presentation describes how we will correct for two terms in the responsivity calibration




GIFTS Imaging Interferometer Specifications


- Two IR focal planes
 - Short/midwave
 - 4.4 to 6.1 μm
 - 1 K absolute accuracy for scenes >240 K
 - Longwave
 - 8.8 to 14.6 μm
 - 1 K absolute accuracy for scenes >190 K
 - 128 x 128 pixels, 110 μm pitch, 4-km pixel footprints at nadir
 - 7 spectral resolutions from 0.6 cm^{-1} to 38 cm^{-1}
 - 0.2 K reproducibility



GIFTS Sensor Module Electro-optical functional diagram

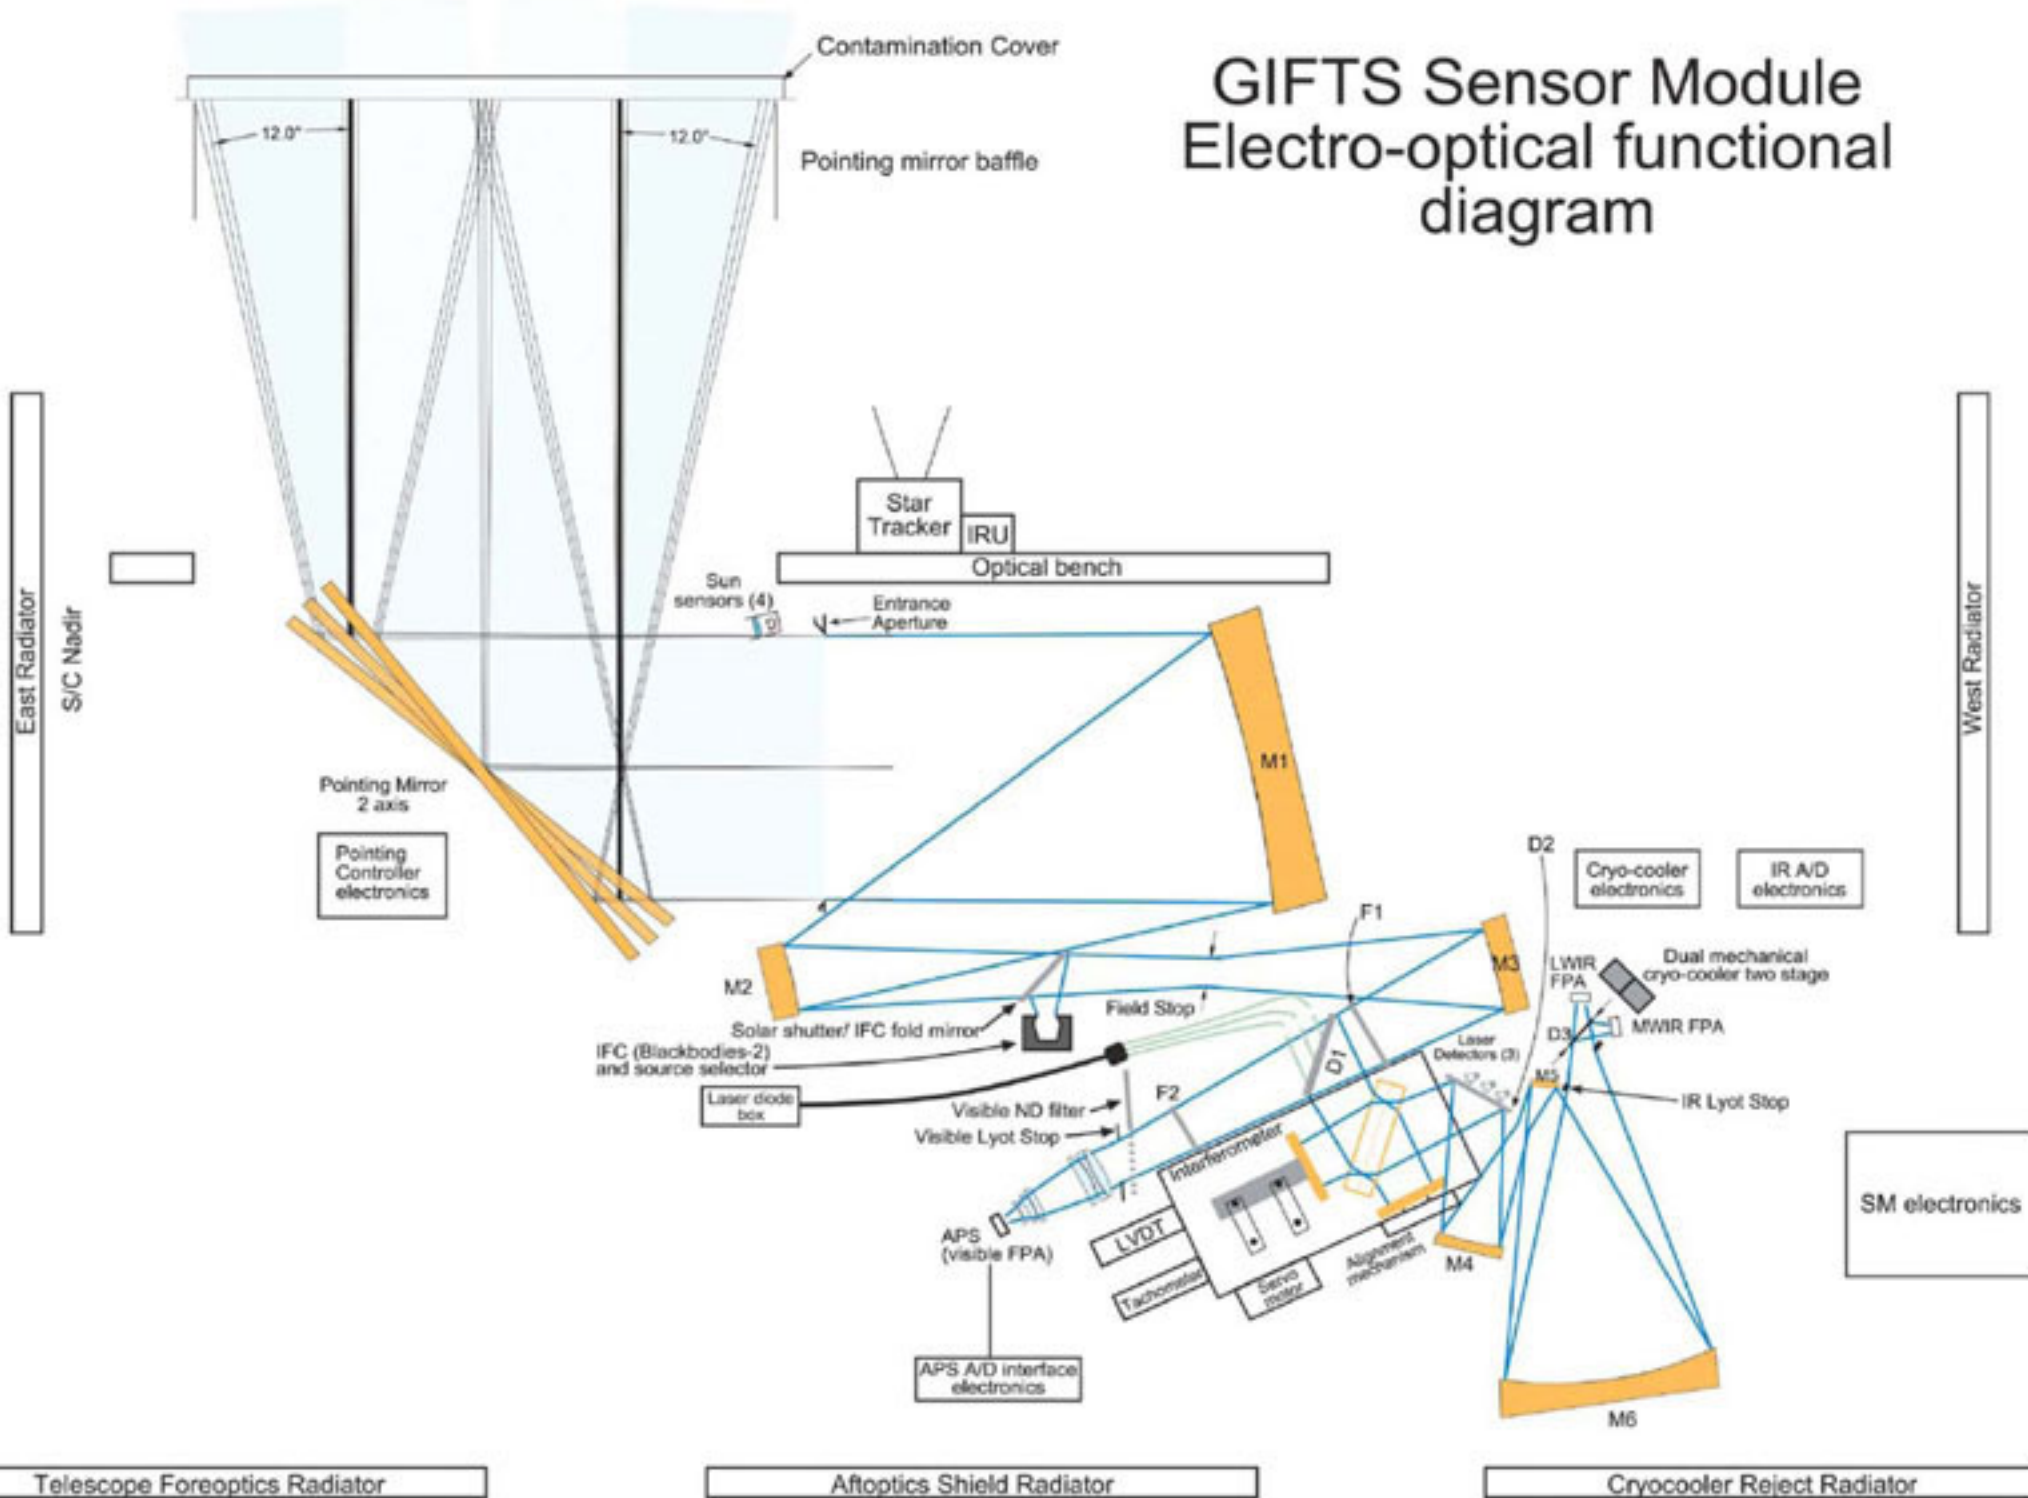

GIFTS Optical Schematic

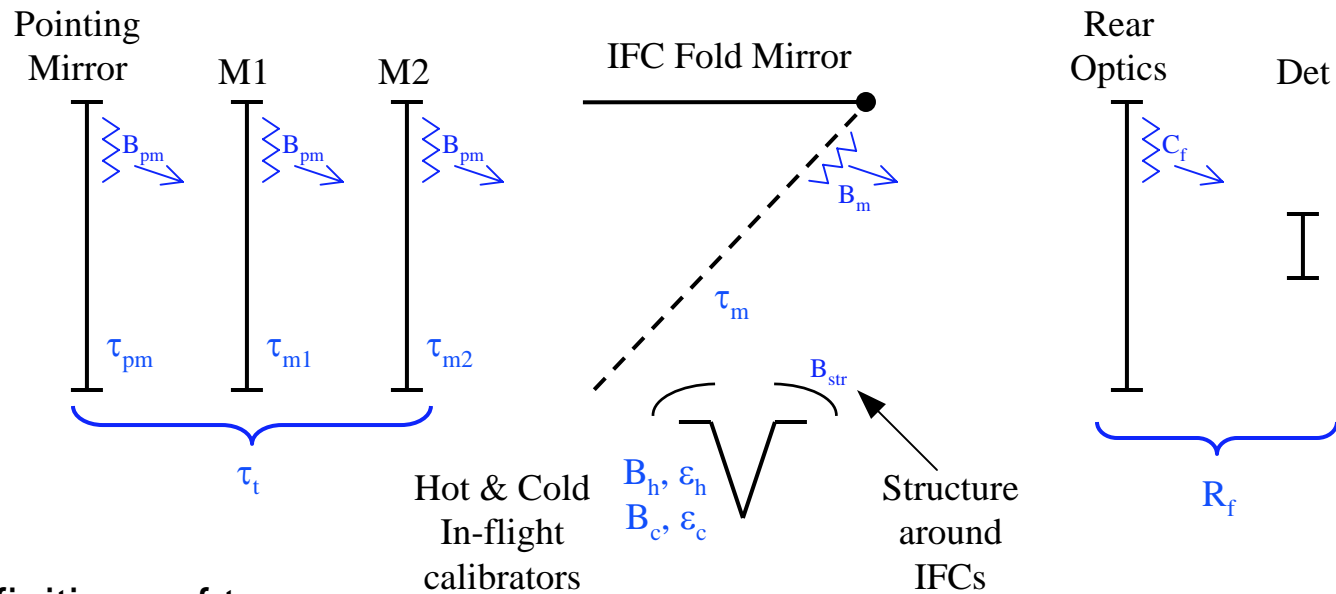


Definitions of terms

- τ_γ Transmissions (reflectances) of elements
- ϵ_γ Emissivities of elements
- B_γ Planck radiances at element temperatures
- C_f Complex response to emissions of the rear optics
- R_f System responsivity



GIFTS Optical Schematic

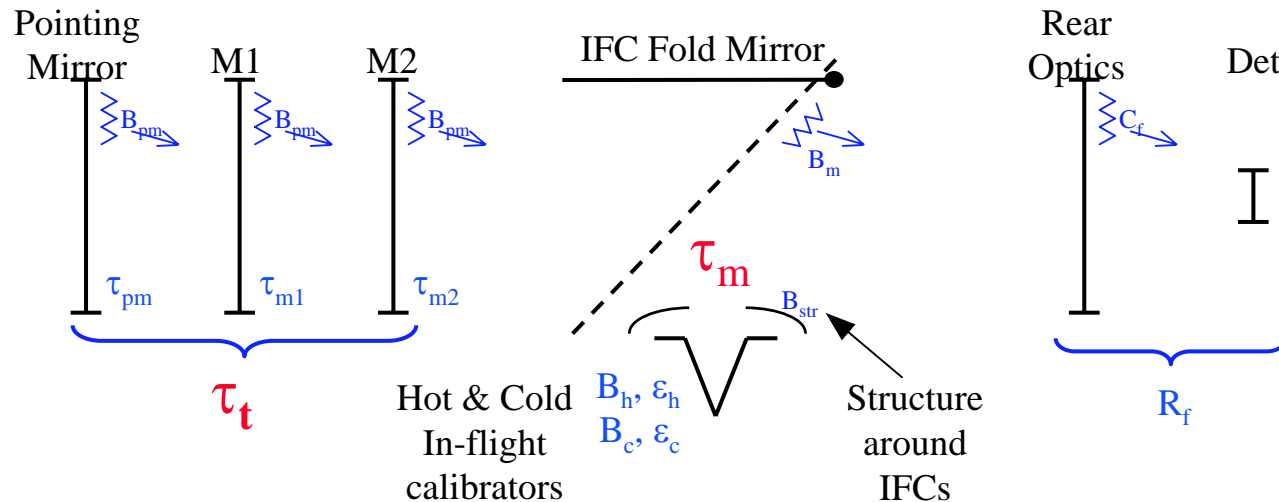

Need to correct for:

τ_t – signal transmission of the telescope mirrors

$$\tau_t = \tau_1 \cdot \tau_2 \cdot \tau_3 \quad \tau_t = (1 - \epsilon_1) \cdot (1 - \epsilon_2) \cdot (1 - \epsilon_3)$$

τ_m – transmission of the blackbody pick-off mirror



Radiometric Calibration

Scene radiance using inflight calibrators¹:

$$N = \left(\frac{\tau_m}{\tau_t} \right) \cdot \text{Re} \left(\frac{C_e - C_s}{R_f} \right) + B_s \quad \text{where} \quad R_f = \frac{C_h - C_c}{B_h \cdot \varepsilon_h - B_c \cdot \varepsilon_c}$$

- where: N Computed scene radiance
B_h, B_c Planck radiances of hot and cold references
ε_h, ε_c Emissivities of hot and cold references (assumed equal)
B_s Planck function of cold space (effectively 0 for GIFTS)
C_h, C_c, C_e, C_s, C_f Measured responses to hot and cold reference, scene, space, and structure (Back end temperatures assumed constant between IFC views)
τ_m Blackbody viewing mirror transmission (assumed constant temp)
τ_t Telescope transmission (reflectivity)



¹ Revercomb, et al., "On Orbit Calibration of the Geostationary Imaging Fourier Transform Spectrometer (GIFTS)", Calcon 200

τ_m and τ_t Measurement

- Fold mirror τ_m and telescope τ_t will change during flight, and such changes must be periodically measured
- The experiments for deriving τ_t and τ_m will be performed quarterly



Assumptions Made in Measuring τ_m and τ_t

- Absorption of gold-coated aluminum telescope mirrors is negligible
- Mirror reflectivities (transmissions) can be computed if mirror emissivities are known

$$\tau = 1 - \varepsilon$$

- Mirror emissivities can be estimated by measuring mirror emissions and the mirror temperatures
- τ_m can be determined in-flight by viewing either IFC at two different fold mirror temperatures



Measuring τ_m Experimentally

- Collect data viewing an in-flight calibrator at two different flip-in mirror temperatures
- By taking the difference of measured emissions at two different fold mirror temperatures, τ_m can be computed as:

$$\tau_m = \left[\text{Re} \left[\frac{(B_h - B_c) (C_{m1} - C_{m2})}{(C_h - C_c) (B_{m1} - B_{m2})} \right] + 1 \right]^{-1}$$

- B_{m1} , B_{m2} , C_{m1} , C_{m2} are the Planck radiances and the measured responses to the cold blackbody with the fold mirror at two different temperatures



τ_m Uncertainties

- Principle uncertainties in measuring τ_m

Error Source	Error	2000 cm ⁻¹	900 cm ⁻¹
		τ_m Uncertainty	τ_m Uncertainty
T_{m1}	1K	0.016	0.046
T_{m2}	1K	0.182	0.107
T_h	0.1 K	0.013	0.010
T_c	0.1 K	0.005	0.007
ϵ_h	0.002	0.008	0.014
ϵ_c	0.002	0.002	0.008
RSS		0.184%	0.118%



Measuring τ_t Experimentally

- Collect a minimum of three measurements with each optical element at different temperatures
- The following steps will be performed to collect data
 - Turn off telescope cooling loop and collect data for 24 hours
 - Collect emission data by viewing cold space
 - After each emissions data collection, close the fold mirror and collect tail-end optics emissions data by looking at the cold blackbody



Deriving τ_t

- Cold space response:

$$C_s = (B_s \cdot \tau_t + L_t) \cdot R_f + C_f$$

B_s Planck radiance of space (4 K), assumed to be 0

τ_t Telescope transmission

L_t Total emission from telescope

R_f System responsivity

C_f Complex emission from optics behind the telescope

With $B_s=0$, the unknowns are the telescope emission, L_t , and the complex emissions from the rear optics, C_f



Deriving τ_t

- C_f can be measured for each telescope emission measurement by looking at the cold IFC

$$C_f = C_c - \left[\left[(B_c \cdot \epsilon_c) + B_{str} \cdot (1 - \epsilon_c) \right] \cdot \tau_m + B_m \cdot (1 - \tau_m) \right] \cdot R_f$$

- L_t , total telescope emission, is the sum:

$$L_t = B_{pm} \cdot \epsilon_{pm} \cdot (1 - \epsilon_{m1}) \cdot (1 - \epsilon_{m2}) + B_{m1} \cdot \epsilon_{m1} \cdot (1 - \epsilon_{m2}) + B_{m2} \cdot \epsilon_{m2}$$

- This can be linearized with the substitutions:

$$\alpha_1 = \epsilon_{pm} \cdot (1 - \epsilon_{m1}) \cdot (1 - \epsilon_{m2}) \quad \alpha_2 = \epsilon_{m1} \cdot (1 - \epsilon_{m2}) \quad \alpha_3 = \epsilon_{m2}$$



Deriving τ_t

A set of simultaneous linear equations can be set up to solve for L_t

$$\frac{C_s - C_f}{R_f} = B_{pm} \cdot \alpha_1 + B_{m1} \cdot \alpha_2 + B_{m2} \cdot \alpha_3$$

- The values on the left side are known
- The B values are computed from element temperatures
- With more than three samples, these equations are then solved using a least-squared error approach for α_1 , α_2 , and α_3
- The resulting mirror emissivities can be computed as:

$$\varepsilon_{pm} = \frac{\alpha_1}{(1 - \varepsilon_{m2}) \cdot (1 - \varepsilon_{m3})} \quad \varepsilon_{m1} = \frac{\alpha_2}{(1 - \varepsilon_{m2})} \quad \varepsilon_{m2} = \alpha_3$$



τ_t Uncertainties

- Principle uncertainties in measuring τ_t


<u>Error Source</u>	<u>Error</u>	2000 cm ⁻¹ <u>τ_t Uncertainty</u>	900 cm ⁻¹ <u>τ_t Uncertainty</u>
T _{pm}	1K	0.067	0.030
T _{m1}	1K	0.064	0.030
T _{m2}	1K	0.067	0.031
T _h	0.1 K	0.021	0.016
T _c	0.1 K	0.007	0.011
ϵ_h	0.002	0.006	0.011
ϵ_c	0.002	0.002	0.006
RSS		0.117	0.057




Overall Radiance Calibration

- The combined uncertainty of the radiance calibration and derivation of τ_t and τ_m has been modeled

GIFTS Radiometric Calibration Errors @ 900 cm⁻¹

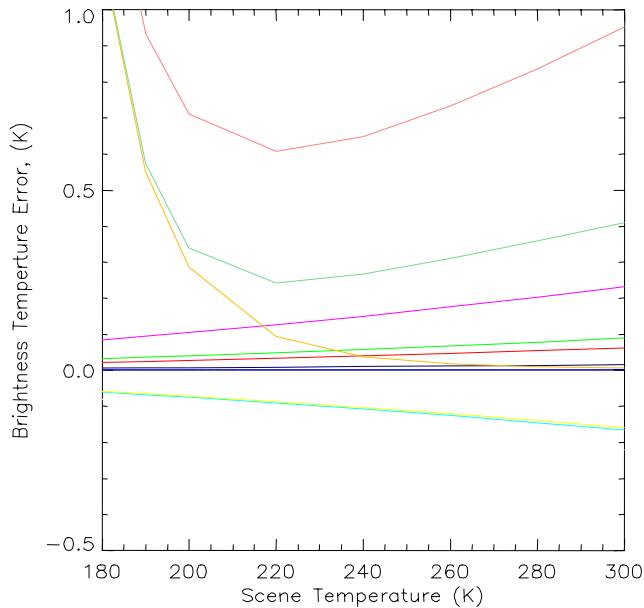

GIFTS Radiometric Calibration Errors @ 2000 cm⁻¹

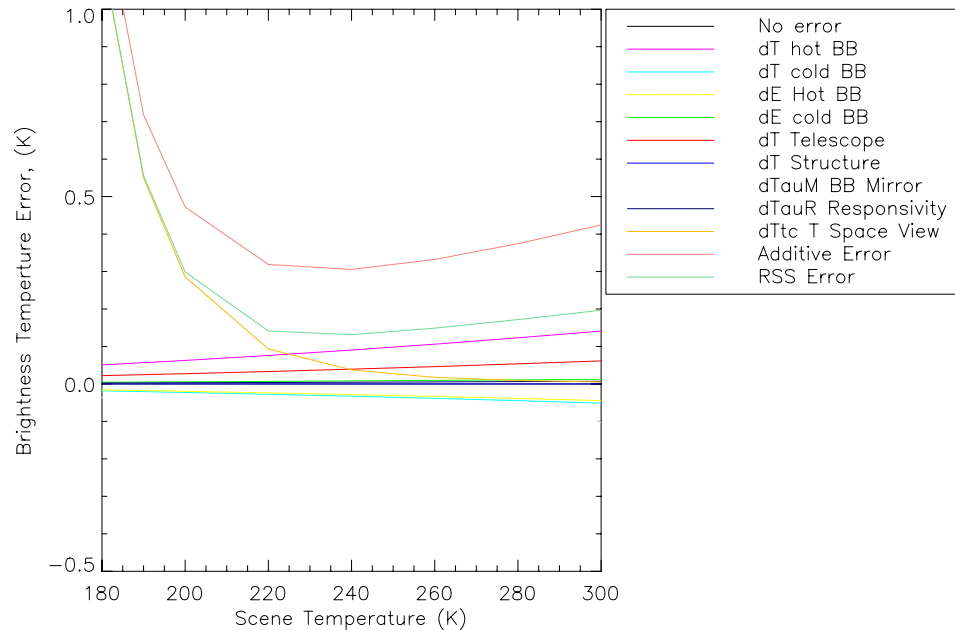

- Responsivity must be computed separately for each pixel, therefore multiple scans must be collected to do any averaging
- τ_m and τ_t are applicable to all pixels
 - A single scan of interferometer data will provide about 16000 samples over which τ_m and τ_t can be averaged
- Still to be addressed
 - Residual nonlinearity
 - Changes in responsivity over 24-hour telescope thermal cycle

